

## SHOWERMATE

### Standard Twin Pumps

Showermate Standard Twin shower pumps can be used to pump the hot and cold water supplies to a shower or bathroom as required. High quality, high performance compact pump supplied with four 15 mm anti-vibration flexible hoses with integral isolation valves on the inlet hoses.

All Showermate Standard pumps are suitable for use in open vented (gravity fed) systems for positive head applications.




#### Features


- 3 year warranty
- 1.5, 2.0 and 2.6 bar options
- Suitable for positive head applications
- High quality, high performing plastic pump supplied with 15 mm flexible hoses with integral ISO valves on inlet hoses
- Quiet operation
- WRAS approved materials
- Continuously rated
- Anti-vibration feet
- EPDM/PTFE/Al. Oxide seal
- Pre-wired with 1.5 metre power cable

#### Application

- Low pressure gravity systems – boosting hot or cold water supplies to a single shower or to up to four outlets within a bathroom
- Showermate Standard pumps are suitable for use where there is already more than 1 litre/min flow from the outlet(s) to be boosted

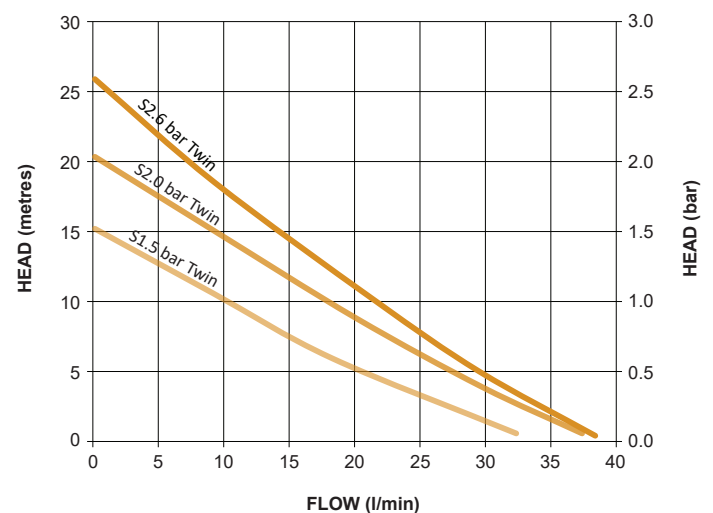

Pump Model		S1.5 bar Twin 47342	S2.0 bar Twin 47343	S2.6 bar Twin 47344
General	Warranty	3 years		
	Approvals	UKCA, CE		
Features	Pump type	Peripheral		
	Pump control	Flow switch		
	Anti-vibration feet	✓	✓	✓
	Flexible hoses	4	4	4
	Dry run protection	✓	✓	✓
	Typical noise	57 dB(A)	57 dB(A)	60 dB(A)
Performance	Maximum head – closed valve	1.5 bar (15 metres)	2.0 bar (20 metres)	2.6 bar (26 metres)
	Performance @ 9 l/min	1.1 bar (11 metres)	1.5 bar (15 metres)	1.9 bar (19 metres)
	Performance @ 18 l/min	0.6 bar (6 metres)	0.9 bar (9 metres)	1.3 bar (13 metres)
	Maximum flow	32 l/min	37 l/min	38 l/min
	Maximum static inlet pressure	10 metres		13 metres
	Maximum working pressure*	380 kPa (3.8 bar)		400 kPa (4.0 bar)
	Maximum ambient air temperature	40 °C		
	Min / Max water temperature**	Min 4 °C / Max 65 °C		
Materials	Pump body	Plastic		
	Impeller	Plastic		
	Mechanical seal	EPDM / PTFE / Al. Oxide		
Connections	Pump connections	G ¾ M		
Flexible hoses	Connections (UK model)	G ¾ F x 15 mm push-fit x 200 mm long, isolating valves on inlet hoses		
Motor	Type	Induction (auto-reset thermal trip)		
	Duty rating	Continuous (S1) @ 9 l/min and above ***		
Electrical	Power supply (Vac/Ph/Hz)	230 V a.c. / 1 / 50 Hz		
	Power consumption – P1	385 Watts	420 Watts	476 Watts
	Current – full load	1.7 Amps	1.8 Amps	2.1 Amps
	Fuse rating	5 Amps		
	Power cable length	1.5 metres (pre-wired to terminal block)		
Physical	Enclosure protection	IP22		
	Length	231 mm	231 mm	268 mm
	Width	132 mm		
	Height – excluding hoses	171 mm	171 mm	184 mm
	Weight – including fittings	4.7 Kg	4.7 Kg	5.2 Kg

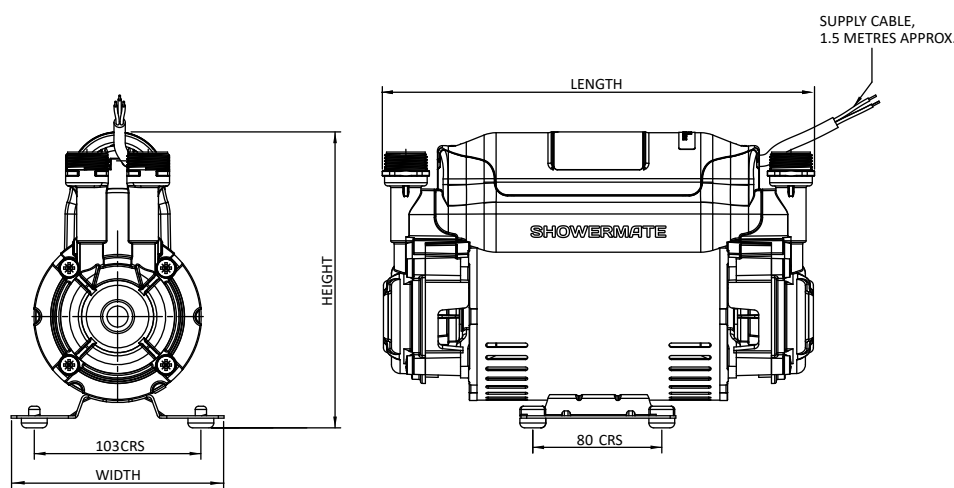

\* The maximum pressure that can be applied to the pump under any installation conditions.

\*\* A stored water temperature of 60 °C is considered sufficient to meet all normal requirements and will minimise deposition of scale in hard water areas.

Stuart Turner Limited reserves the right to amend specifications without notice.

Stuart Turner Ltd, Henley-on-Thames, Oxfordshire RG9 2AD Tel: +44 (0) 1491 572655 Fax: +44 (0) 1491 573704  
TechAssist Helpline +44 (0) 800 31 969 80  
www.stuart-turner.co.uk

Pt. No. 19215 Issue 5020/04-01