




ES1247B

1 Channel Multi Purpose Programmer

- Large, easy to read LCD with blue back light
- 7 day, 5/2 or 24 hour operation
- 2 on/off or 3 on/off per day
- System protection during periods of low activity
- Automatic BST/GMT 1 hour time change
- Factory set clock and date
- Easy to use overrides
- Holiday Mode
- Fits on industry standard backplate
- Easy to use and quick to install

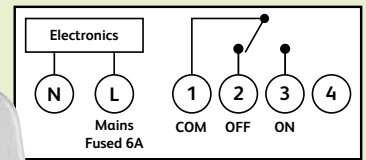

3 Channel Multi Purpose Programmer

The ESi Controls range of programmers are a feature packed range, offering flexibility and reliability for use in any domestic heating and hot water installations. They have been designed with simplicity in mind, with an easy-to-use slider to operate the permanent settings underneath the fascia, whilst the temporary settings are easily accessible and clear. This new range of programmers also includes a simple holiday mode button, to adjust the heating quickly and easily for homeowners.

The ES1247B is a single channel multi purpose programmer, designed primarily for timed control of your heating and hot water. Ideal for use with a combination boiler or a single heating zone. It can also be used in conjunction with an existing programmer to control additional heating zones or for when additional hot water cylinder control is required.

The white back light on the programmer can be switched permanently on or off, depending on the user's preference. When the back light is off, it can be lit at the push of a button and will then turn off again. The programmer can be configured for 24 hour, 5/2 day or 7 day operation, and has the flexibility of either two or three on/off timings per day.

Technical Data

| | |
|-----------------------------------|---|
| 1 channel programmer | ES1247B |
| Independent time control channels | 1 |
| Power supply | 230V AC, 50Hz |
| Operating temperature | 0°C to 35°C |
| Total switch rating | 230V AC, 6(2)A (Total) |
| Contact type | 1B , Micro disconnection (Voltage free) |
| Battery type | Lithium Cell CR2032 |
| Enclosure | Protection: IP30 |
| Plastics | Thermoplastic, flame retardant |
| Insulation class | Double |
| Wiring | For fixed wiring only |
| Backplate | Industry standard |
| Dimensions | 140mm x 90mm x 30mm |
| Clock | 12 hour am/pm, 1 minute resolution |
| BST/GMT time change | Automatic |
| Program cycle | 24hr, 5/2 day or 7 day selectable |
| Program on/off's per day | 2 on/off's, 3 on/off's selectable |
| Program selection | Auto, on all day, on constant, off |
| Program override | +1, 2 or 3Hr, advance |
| Heating system | Pumped |
| Complies with | EN60730-1, EN60730-2.7, EMC Directive 2004/108/EC, LVD Directive 2006/95/EC |