Instaflow

Instaflow Stored Water Heater 1.5kW 5L, 2kW 10L, 2kW 15L

The compact Instaflow stored water heater range is ideal for under sink installations and provides an efficient way to deliver hot water on demand where there is no central supply connection available.

INSTALLATION PRODUCT DATA

Capacity	5L,10L,15L
Power Ratings	1.5kW (230v) - 5L 2.0 kW (230v) - 10L & 15L
Energy Rating	B
Installation	Wall hung – brackets supplied Dielectric Connectors Pressure Relief Device
Electrical Connection	10A Plug Socket
Temperature Control	Thermostatic
Max Temperature	75°C
Min Pressure	0.5bar
Max Pressure	6 bar
Water Connection	1/2" BSP

INFO

- Suitable for under-sink installation with top water connections
- Temperature selection is located on the front of the unit for ease of operation
- Stainless steel tank with enamel lining to prevent any corrosion build up
- Heat Up Time: 5L (15mins), 10L (23mins), 15L (35mins)
- Range of accessories available – Expansion vessel, Discharge Tundish & Pressure Reducing Valve

ACCESSORIES

Instaflow Kit A 2L Expansion Vessel & Non-return valve	SPINSFEXV2
Instaflow Kit B 3.5bar Pressure Reducing Valve	SPINSFPRV3
Instaflow Kit C Discharge Tundish	SPINSFDT

CODES

Product	Power	Code
5L Model	15kW	SPINSF500S
10L Model	2kW	SPINSF100S
15L Model	2kW	SPINSF150S

DIMENSIONS

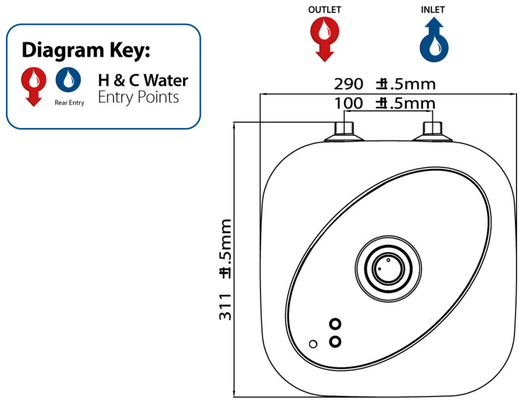

TWO YEAR GUARANTEE 2 BEAB Approved CE IPX4