

SSHE Storage Heater



Product Description

An advanced electric storage heater with a clean look and reliable performance. SSHE storage heaters provide an upgraded and compliant replacement for older storage heaters

Key Features

- Complies with Lot 20 of ERP Directive
- Programmable room temperatures with 7-day timer
- Efficient heating system with low running costs delivered by maximising the use of off-peak tariffs
- Dynamically stores the right amount of energy to heat a room
- Controllable electronic heat output to match user lifestyle
- Fan assisted to quickly, quietly & more effectively distribute heat
- Supplied with 40mm feet for weight distribution when secured to wall. Two feet positions available.
- Slimline design that covers traditional storage heater fixing marks

Requires Energy Cell Packs to function. Item: 047243 (included with purchase)


Technical Details

Controls	Digitally controlled, Electronic Thermostat accurate to ($\pm 0.2^{\circ}\text{C}$). Setpoint range ($7\text{--}26^{\circ}\text{C}$) Timer modes: 7 Day Programmable User Timer, Out All Day, Holiday. Continuous heat modes: Setback
Controller UI	Graphical display with white backlight, capacitive buttons with audio feedback, user replaceable battery (Coin-Type)
Controller Functions	Open window detection, Automatic Charge Control, Bluetooth for software updates, Child Lock
Supply	1/N/PE 230-240V / 50Hz (Peak / Off Peak) Class II
Battery Backup	3.3V coin cell battery to backup real time clock. Battery life > 5 years.
Storage Core	High-density bonded magnetite energy cells
Safety Features	Electronic overheat protection. Additional electromechanical overheat protection. LVD and EMC compliance.
IP Rating	IPX4
Approvals	CE & BEAB
Colour / Finish	White (RAL 9016) 'Traffic White' Grill RAL7035 anodised
Warranty	2 Years
Country of Origin	United Kingdom

Packaging Details

	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
SSHE050	838	703	245	23
SSHE070	838	825	245	26
SSHE100	838	947	245	28
SSHE125	838	1069	245	34
SSHE150	838	1191	245	36

Dimensions

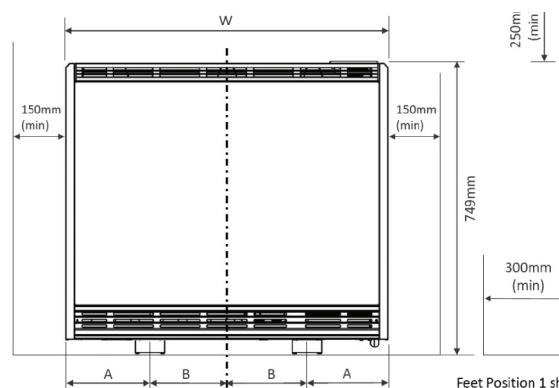

Model/Item No.	SSHE050	SSHE070	SSHE100	SSHE125	SSHE150
Feet Position 1 'A/B'	167/124	167/185	167/246	160/314	160/375
Feet Position 2 'A/B'	93/198	93/259	93/320	100/374	100/435
Output (kW)	0.50	0.70	1.00	1.25	1.50
Height (mm)	749	749	749	749	749
Width (mm)	581	703	832	947	1069
Depth (mm)	182	182	182	182	182

Output					
Input Rating +5%/-10%	1020W	1560W	2220W	2760W	3300W
Output Rating	500W	700W	1000W	1250W	1500W
Boost Mode Rating	340W	520W	740W	920W	1100W
Max. Storage Capacity	7140	10920	15540	19320	23100

Additional Information

	Ti	Hi	Pallet Quantity
SSHE050	5	2	10
SSHE070	5	2	10
SSHE100	5	2	10
SSHE125	4	2	8
SSHE150	4	2	8